



⚠ WARNING

- ⚠ Store small parts in a secure place out of reach of children.
- ⚠ To be used under the direct supervision of an adult.

⚠ CAUTIONS

1. The age range for the use of this product is 2-5 years old.
2. This product requires adult assembly.
3. Please carefully check any movable accessories and fasteners for firmness before use to ensure the safe use of the vehicle body.
4. Do not let children stand alone on the car.
5. Do not use it near thresholds, stairs, or uneven terrain, as it may cause injury.
6. When riding, one should stay away from slopes, highways, streets, water pools, high temperatures and humidity, power sources, etc.
7. When children ride, no other children are allowed to push them.
8. Maximum loading weight: 50KG/110LB. For safety, please do not overload.

INCLUDED COMPONENTS




- | | | | |
|----------------|------------------------|---------------|-------------------|
| ① Main Frame | ② Front Wheel | ③ Basket | ④ Handlebar |
| ⑤ Bicycle Seat | ⑥ Connecting Rod Shaft | ⑦ Fixed Shaft | ⑧ Steering Handle |
| ⑨ Pedal | | | |

INSTALLATION STEPS



1. Install the front wheel^② onto the main frame^①

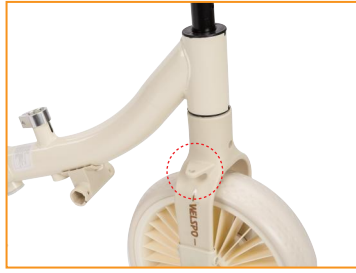

2. Ensure proper left/right orientation of the handlebar as shown in the picture



3. Mount the basket^③ and handlebar^④ in sequence



4. Tighten the long screw to secure



5. Remove the kit from the Connecting rod shaft^⑥



6. Pass the connecting rod shaft^⑥ upward through the main frame^①



7. Reinstall the connecting rod shaft kit



8. Tighten the short screw to secure



9. Install the bicycle seat^⑤. Adjust it to the desired height, then tighten the locking screw securely




10. Remove the center screw from the fixed shaft^⑦



11. Hook one end of the fixed shaft^⑦ into the reserved hole on the front wheel^②



12. Insert the other end of the fixed shaft^⑦ into any available hole on the connecting rod shaft^⑥

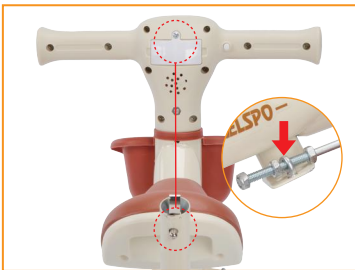

13. To achieve alignment between the handlebar^④ and connecting rod shaft^⑥, fine-tune by turning the screw on the fixed shaft^⑦ left or right




14. Confirm proper alignment, then tighten the screws on both sides of the fixed shaft^⑦. This finalizes the position



15. Install the steering handle^⑧ onto the connecting rod shaft^⑥



16. Once the height is adjusted, tighten the fastener to secure it in place

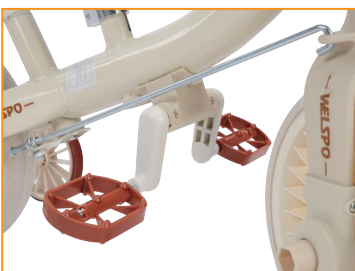

17. Install the pedal^⑨ into the main frame^①. This serves as your footrest



18. The pedal^⑨ can also be installed on the front wheel^②



19. To retract the training wheels, press and hold the white button



20. Installation Complete